

ADHERE THE DEMISTER TO THE BACK OF THE MIRROR

The self adhesive demister must be in contact with the mirror back for it to function correctly.


Place the demister on the back of standard mirrors with a thickness of 3 to 6mm.

If an air bubble appears between demister and the mirror, it must not be pierced. These bubbles are a result of handling and neither affects the operation nor is it detrimental in any way.

1. Lay the mirror face down on a protective cushioned surface.


Clean the mirror back surface, making sure it is dry, clean and free of dust, grease or any other contaminates.

Pencil mark the position of the demister on the back of the mirror.

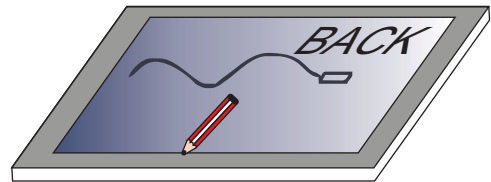


2. Turn the demister over.

Remove approximately 10cm of protection film and fold it back.

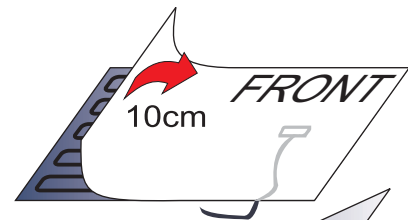


3. Flip the demister pad again, adjust it to the marked position, use a dry cloth and press the bonding foil on to the back of the mirror.


Use a dry cloth to press the bonding foil on to the back of the mirror.

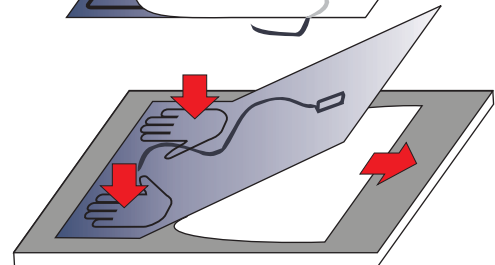


4. Slowly peel the protection film back while pressing and rubbing the bonding foil on to the back of the mirror with the dry cloth. It is easiest with two people, one peeling and one pressing.

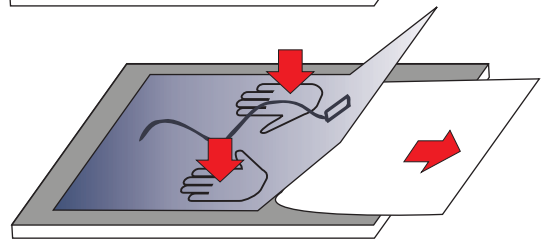

5. Mark and transfer dimensions of the mirror and location of the power cord.



6. Recess a 50-60mm diameter hole in the wall surface in the location of the power cord so the mirror sits flat on the wall.

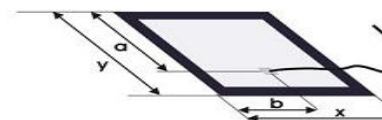

CONNECTING THE DEMISTER TO THE POWER (240V) - by electrician only

A transformer or thermostat is not required.

The demister is double insulated, eliminating the need for an earth cable.


The 1.3m long power supply cord can be connected to:

- a light switch,
- a Coldbuster floor heating thermostat (or other dedicated timer switch),
- its own power switch.

We recommend two people install a heated mirror.
Allow 1mm gap all around for mirror expansion if fitting into a wall recess.

HOLES & DOMES - MIRROR MOUNTED TO THE WALL

1. Ensure the mirror sits flat by holding it against the wall in the correct position. At the same time, mark the center of the 4 holes.
2. Use an electrician to connect the demister power cord.



3. Hang the mirror as per holes & domes instruction supplied with the mirror. Feed the excess wire into the wall cavity during installation.
4. Seal the mirror edges using a neutral cure silicon.



FOR TILED WALLS

If you do not wish to recess a hole in the tiles, the mirror can be packed behind the holes using a number of rubber washers. Use longer screws. Ensure you only hand tighten the screws so the corner of the mirror does not bend and snap.

HIDDEN FIXINGS - MIRROR MOUNTED TO THE WALL

1. Mount the mirror wall brackets onto the wall.
2. Hang the mirror first to ensure it fits correctly




3. Remove the mirror and connect the demister power cord to the power.
4. Hang up the mirror and feed excess wire into the wall.




GLUE FIX - MIRROR MOUNTED ON THE WALL

The size of the demister must be chosen carefully in order to have enough area around the demister to fix the mirror directly to the wall. Ensure you have sufficient area on the back of the mirror for glue and adhesion. Ensure wall is firm, flat, level and dry. Apply glue or tape to the back of the mirror, not to the heating element.


1. Ensure the mirror sits flat by holding it against the wall in the correct position.
2. Roughen wall surface with sandpaper for better adhesion, then clean and dry thoroughly.

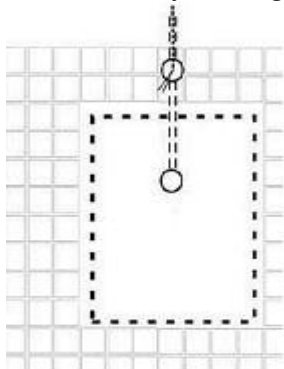

3. Apply neutral silicon and/or adhesive tape to the surface of the wall. Ensure the silicon or tape only sticks to the mirror backing (not the heating element).

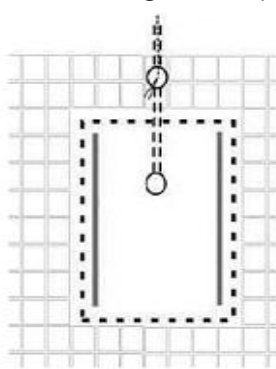

4. Thread a wire through an electrical conduit or pipe. Connect the demister power cord to the wire. Fix the mirror onto the wall while pulling the wire through the conduit/pipe.

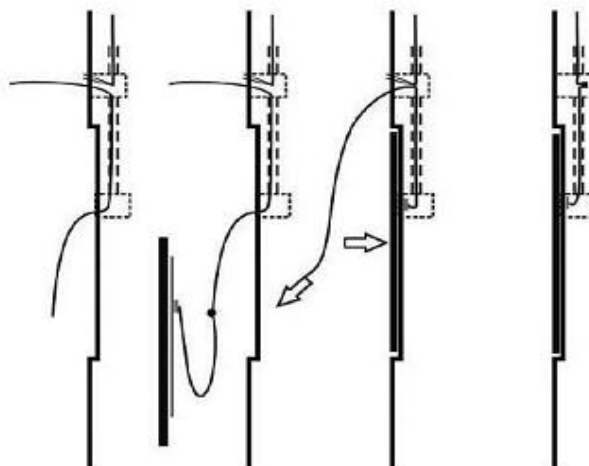

Energy Efficient



5 Year Warranty



European Conformity



RoHS Compliance



cULus Compliance

IPX7

Head Office:

10/14 Rodborough Road
Frenchs Forest NSW 2086
Phone: +61 2 9982 5374

For free quotes Australia-wide:

call: 1800 85 75 65
email: sales@coldbuster.com.au
visit: www.coldbuster.com.au

COLDBUSTER
floor heating

October 2020